
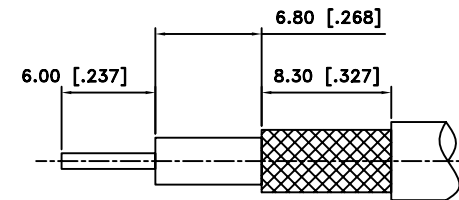




REV	DATE	DESCRIPTION
A	01/07/04	MODIFY BODY LENGTH/COVER/UPDATE FORMAT

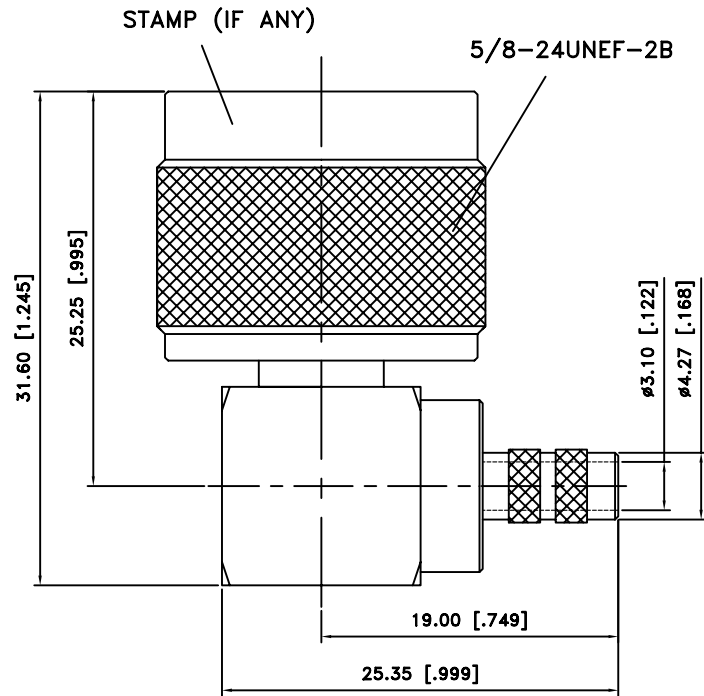

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"



ChoiceRight Electronic Inc

TITLE N R/A CRIMP PLUG (FOR RG-58/U, 58C/U CABLE)		CHECKED J. Lin	
Edt Code. NMR00104F5000-1		DRAWER Eddie	
FILE NO. C:	EDITION: A	DATE 01/07/04	SCALE NA UNIT MM

9				
8				
7				
6				
5	CLAMP NUT	COPPER	NEXCOTE	1
4	FERRULE	BRASS	NEXCOTE	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY